







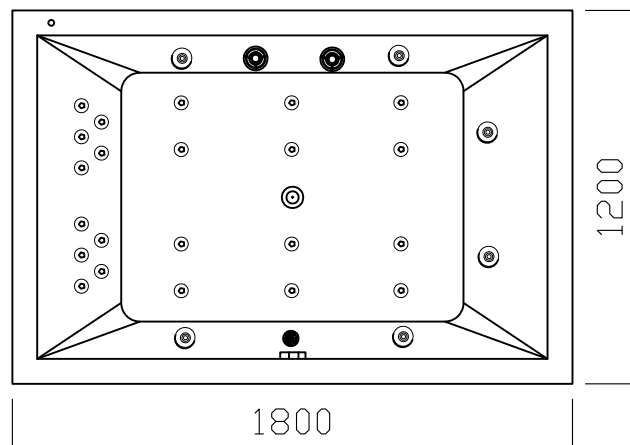
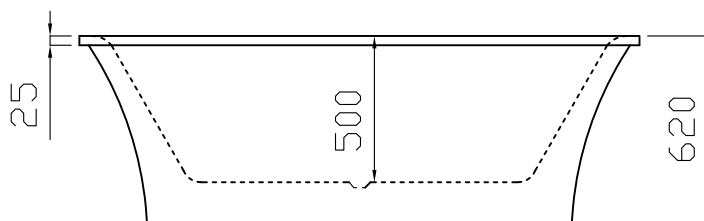
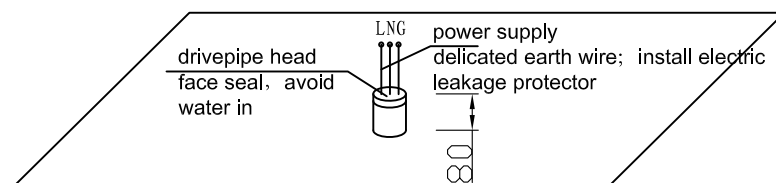
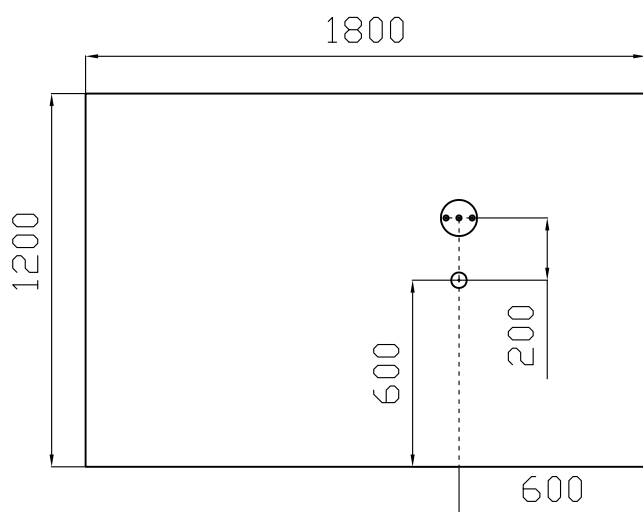


Model	WB247((four panels)/B6S	without deck-mount faucet	Size	1800X1200X620mm
No.	Configuration	Sketch	Unit	Qty
1	HP1.5pump (220V,50HZ)		pcs	2
2	turbo jet(can be closed)		pcs	6
3	little jet(can be closed)		pcs	22
4	round handle drain		set	1
5	1.5"backwater (with chromeplate cover)		pcs	2
6	chromatherapy lamp		pcs	1
7	B6S control system		set	1
8	cleaner bottle		pcs	1



Plane Graph

Product Parameter List	
rated power of pump/voltage/current	2250W/220VAC/10.2A
rated power of heater/voltage/current	2000W/220VAC/9A
water supply splice	G ₂ ¹ " metric external thread
drain pipe	no less than 1.5"
minimum water consumption(L)	260
maximum water consumption(L)	410



earth electrical power supply installation requirement: 80mm higher than ground

water&power supply connection

(Additional floor-stand faucet is needed, working plan of cold/hot water entry should fit the position of real object)

○..... drain pipe (no less than 1.5")

⊙..... cold water supply pipe(G₂¹"metric external thread, connecting the cleaning pipe of tub)

⊙.....power line (refer to configuration, choose square numbers of electric wire (can refer to parameter list) .Product should connect earth wire.)