## NIIMI ROUND 0760 SKU 1163001

# astro



### PRODUCT SPECIFICATION

#### GENERAL

FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Zinc **GROSS WEIGHT:** 2.55 (kg)

D: 115 - 350mm Ø: 250mm **DIMENSIONS:** CLASS: CE (Class II) INSTALLATION ORIENTATION: Wall Mount - Horizontal IP RATING: IP44 **CUT OUT HOLE:** Not Applicable Zone 2, 3 **BATHROOM ZONE:** 

**RECESS DEPTH:** Not Applicable **VOLTAGE:** Mains 230V

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: per m LED strip MACADAM ELIPSE: 6-Step MAXIMUM WATTAGE: 0.395 x 14.4W UGR: Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable

LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 90 (Degrees) **LUMINOUS FLUX:** 134.49 (lm) **ROTATION ADJUSTMENT ANGLE:** 180 (Degrees) COLOUR TEMP: AVERAGE LIFESPAN: 3000 (K) Not Applicable To Be Advised

CRI: 65 L70: R9: 0.0

**ELECTRICAL** 

SWITCHED: SUPPLY FREQUENCY: 50/60 (Hz) Yes DIMMABLE: No DRIVER/BALLAST VOLTAGE: 220-240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 60,000 (Hrs) **DRIVER OUTPUT CURRENT:** EFFICACY:


Not Applicable 4.67 (Im/W) DRIVER OUTPUT VOLTAGE: DRIVER INCLUDED? 12 (V) Yes (Integral)


#### ADDITIONAL INFORMATION



**BOX QUANTITY X6** 

Œ

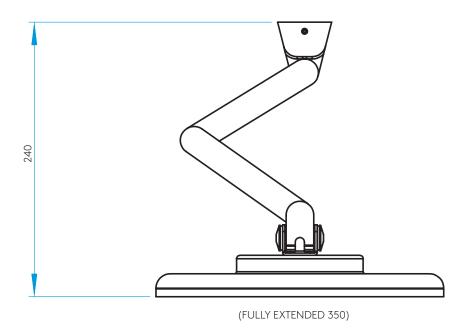

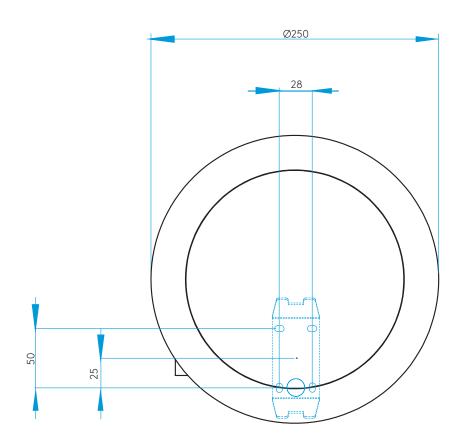

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com