
astro



PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Mild Steel **GROSS WEIGHT:** 1.86 (kg) D: 278mm DIA: 215mm **DIMENSIONS:** CLASS: CE (Class II) INSTALLATION ORIENTATION: Wall Mount - Horizontal IP RATING: IP44 **CUT OUT HOLE:** Not Applicable Zone 2, 3 **BATHROOM ZONE: RECESS DEPTH:** Not Applicable **VOLTAGE:** Mains 230V FIRE RATING: Not Applicable PRODUCT F MARK:

Suitable for mounting on flamable materials

To Be Advised

LAMP

LIGHT SOURCE: per m LED Strip MACADAM ELIPSE: 5-Step MAXIMUM WATTAGE: UGR: 0.405 x 14.4W per m LED Strip Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** To Be Advised LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 65 (Degrees) **LUMINOUS FLUX:** 76 (lm) **ROTATION ADJUSTMENT ANGLE:** 180 (Degrees) **COLOUR TEMP:** AVERAGE LIFESPAN: 2700 (K) Not Applicable

CRI: 80 L70: R9:

-3.6

ELECTRICAL


SWITCHED: SUPPLY FREQUENCY: 50/60 (Hz) Yes DIMMABLE: No DRIVER/BALLAST VOLTAGE: 220-240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 60000 (Hrs) **DRIVER OUTPUT CURRENT:** Not Applicable EFFICACY: To Be Advised DRIVER INCLUDED? DRIVER OUTPUT VOLTAGE: 12 (mA) Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY X6

Œ

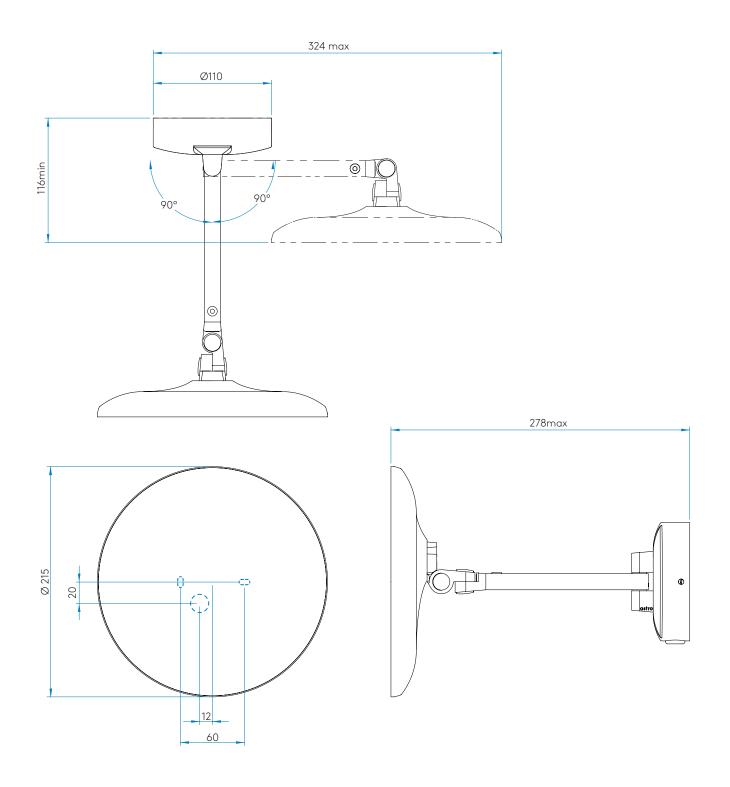

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com